you can

Canon

MULTIMEDIA PROJECTOR

LV-7265

Stunning performance. Exceptional value.

With a Canon wide-angle 1.6x zoom lens, the LV-7265 is ideal for spaces of any size - from corporate boardrooms to smaller meeting rooms. XGA resolution, powerful brightness and a DVI port ensure crisp, clear images even in broad daylight.

- Native XGA resolution for crisp image detail
- 2500 lumens for ultra bright images even in daylight
- High 600:1 contrast ratio for brighter whites, darker blacks and vivid colours
- Near-silent 30dBA Quiet Mode
- Flexible placement and short throwing distances with Canon wide 1.6x zoom lens
- Automatic Vertical Keystone Correction, ensures image edges stay parallel
- HDCP-enabled DVI port for razor-sharp images from digital sources, including encrypted content
- Built-in 5W speaker for convenient, powerful sound
- Screen Colour Correction for natural colours when projecting onto coloured surfaces
- Fast 8 second start up and just 30 second cool down
- Lightweight - weighs just 3.1kg.

Specifications **LV-7265**

LCD PANEL	
Type	Transmissive LCD, Poly-silicon TFT Active Matrix
Size and Number	0.63" diagonal with microlens, 3 panels
Aspect Ratio	4:3
Native Resolution	1024 x 768 (XGA), 786432 pixels
OPTICS	
Light Source	200W NSH lamp
Lens F Number & Focal Length	F1.6 - F2.5; f=17.7 - 28.3mm
Zoom Magnification & Control	1.6x Manual
Focus Control	Manual
Lens Shift	8.4 : 1.6 (fixed)
IMAGE AND AUDIO	
Brightness	2500 lumens (1875 lumens in Quiet Mode)
Brightness Uniformity	85%
Contrast Ratio	600:1 (full on / full off)
Projection Distance Coverage	1.0m - 8.4m (2.8m - 4.3m for a 100 inch image)
Screen Size	25" - 300" (51 x 38cm - 610 x 457cm)
Digital Zoom Magnification	1x - 4x (16x Area Ratio)
Keystone Correction Range	Vertical: +/- 30° (Auto / Manual)
Digital RGB Compatibility	SXGA+ / SXGA / XGA / SVGA / VGA / MAC
Analogue RGB Compatibility	UXGA / SXGA / XGA / SVGA / VGA / MAC
Digital Video Scan Systems	1080i / 720p / 575p / 480p
Component Video Scan Systems	1080i / 720p / 575p / 575i / 480p / 480i
Video / S-Video Colour Systems	PAL / PAL-M / PAL-N / PAL-60 / NTSC / NTSC4.43 / SECAM
Digital Scanning Frequency	Horizontal: 31-90kHz, Vertical: 50-85Hz, Clock: 108MHz
Analogue Scanning Frequency	Horizontal: 15-100kHz, Vertical: 50-120Hz, Clock: 108MHz
Display Modes	Standard, Presentation, Movie, Video, sRGB, Custom
Image Enhancement	Digital Gamma Correction
Built-in Speaker	5.0W RMS, Monaural

CONNECTORS	
Analogue RGB Input 1	Mini D-Sub 15-pin (Component Video via optional cable)
Digital RGB Input / Analogue RGB Input 2	DVI-I 29-pin, HDCP compatible
Analogue RGB Output	Mini D-Sub 15-pin
S-Video Input	Mini DIN 4-pin
Composite Video Input	RCA x 1
Audio Input 1	3.5mm2 stereo mini-jack x 1
Audio Input 2	RCA x 2 (L/R)
Audio Output	3.5mm2 stereo mini-jack x 1 (variable level)
Service Port / Projector Control	Mini-DIN 8-pin
MECHANISMS	
Front Elevation Mechanism	Mechanical foot, 10° maximum image elevation
RATINGS	
Dimensions (W x H x D)	310mm x 109mm x 265mm
Weight	3.1kg
Power Source	100V - 240V AC, 50/60Hz
Power Consumption	Normal Mode: 285W Quiet Mode: 220W Standby: 9W
Noise Level	Normal Mode: 35dBA, Quiet Mode: 30dBA
Operating Environment	+5°C to +40°C
Storage Environment	-10°C to +50°C
Warranty	3 years (90 days for lamp)

Some images are simulated for clarity of reproduction. All data is based on Canon's standard testing methods. This leaflet and the specifications of the product have been developed prior to the date of product launch. Final specifications are subject to change without notice. ™ and ®: All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries

Accessories

In-box	Optional					
- Soft Carrrying Case - Remote Control Unit - AAA Alkaline Batteries x 2 - Lens Cap - AC Mains Power Cable - VGA Computer Connection Cable - USB Infrared Mouse Receiver - DVI to VGA Adaptor						
	Replacement Lamp LV-LP26	Canon Ceiling Mounting Bracket LV-CL11	DVI Cable LV-CA29	Component Video Adapter Cable LV-CA32	RS-232C Control Cable LV-CA34	VGA Extension Cable, 10 metres LV-CA02

TRUE THROW DISTANCES							
Screen Size							
inches cm	25 51 x 38	40 81 x 61	80 163 x 122	100 203 x 152	150 305 x 229	200 406 x 305	300 610 x 457
Projection Distance							
Zoom max	-	1.1m	2.2m	2.8m	4.2m	5.6m	8.4m
Zoom min	1.1m	1.7m	3.5m	4.3m	6.5m	-	-

For more information regarding throw distances, please visit: www.canon.com/lcd-sim

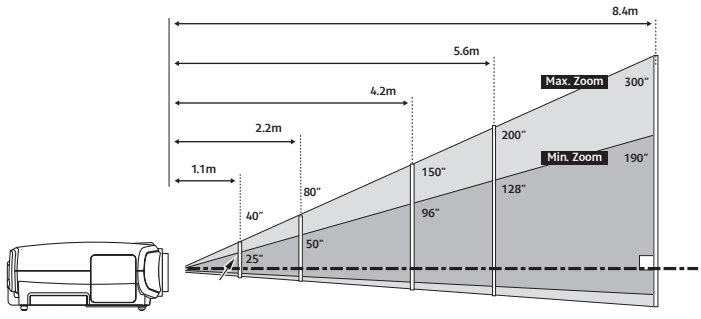

you can

Canon

Canon Inc
www.canon.com

Canon Europa NV
www.canon-europe.com

Canon (UK) Ltd
Woodhatch, Reigate
Surrey RH2 8BF
Telephone No: 08000 353535
Facsimile No: 01737 220022
www.canon.co.uk

WWF Canon Europe, Middle East & Africa Conservation Partner

English-UK Edition
© Canon Europa N.V., 2006 (0207)